



盐城托普轮胎有限公司

YANCHENG TUOPU TYRE CO., LTD.

CATALOGUE
OTR IND&AGR TYRE





盐城托普轮胎有限公司 YANCHENG TUOPU TYRE CO., LTD.

盐城托普轮胎有限公司成立于1997年，坐落于交通便利的黄金地段—中国江苏盐城。我们专业从事非工业轮胎的设计，生产，销售。我们主要有两个生产基地。主要生产非公路轮胎，农业轮胎，工业轮胎和实心胎。公司现占地面积为100,000平方米，拥有250多名员工，其中15名为技术人员。公司拥有先进的生产技术，配备一流的轮胎生产设备。我们主打产品的品牌有TOPOWER 和JADEKING.

另外我们公司最近在盐城阜宁投资了一家实心轮胎工厂。工厂投资10,000,000美元，占地面积为200,000平方米。我们的目标是将我们的实心胎打造成与solideal, continental, TOYO 等齐名的世界知名品牌。

我们的产品目前已获得ISO9001:2008, ISO/TS 16949:2002 质量体系认证, CCC, PHAS。我们的产品拥有良好的国内市场，并远销到澳大利亚，比利时，加拿大，伊拉克，牙买加，波兰，墨西哥，荷兰，新加坡，乌克兰，美国等地。我们的产品得到国内外客户的一致认可。

“卓越的品质，一流的服务”是我们一贯坚持的准则。我们热忱欢迎新老客户的咨询。我们希望和世界各地朋友合作。

Yancheng Tuopu Tyre Co.Ltd that is located at Yancheng Jiangsu China is set up at 1997. It is in the golden place that the transportation is very convenient. Which specializing in designing, manufacturing and marketing of off road tires. We are primarily comprised of two factories who manufacture OTR tires, Agricultural tires, Industry tires and Solid tires. The area of the manufactory is 100,000 sqm. Now, it has more than 250 staffs, including 15 technicians. Our company is equipped with advanced tire equipment and technology. The brand of main products are TOPOWER and JADEKING.

And in 2012, our company newly invest a new solid tire factory in Funing County, Yancheng City, which is 200,000 sqm with amount of capital invested 10,000,000 USD. Our aim is making our solid tires to be a international famous brand, like Solideal, Continental, TOYO, etc.

The products have attained ISO9001:2008 and ISO/TS 16949:2002 quality management system certificate, CCC, PHAS. At present, the products sell well in domestic marketing and export to Australia, Belgium, Canada, Iraq, Jamaica, Poland, Mexico, Holand, Singapore, Ukraine, USA, etc. and much favorable comment from our clients.

"Excellent quality, perfect service" is the principle that we adhere forever. We sincerely welcome inquiries from both new and old customers; and we are looking forward to developing co-operative relationships with partners around the world.



Industrial Tires



TP401



TP402



TP403



TP404



TP405

SIZE	Pattern	PR	Standard Rim	S.W. mm	O.D. mm	Max Loda (kg)	Pressure (kpa)
4.00-8	TP403	6PR	2.50D	112	415	640	720
5.00-8	TP401 TP402 TP403 TP405	10PR	3.50D	137	470	1295	900
5.50-15	TP403	8PR	4.50E	157	670	1970	700
5.70-8	TP403	10PR	3.50D	137	470	1295	900
6.00-9	TP401 TP402 TP403 TP405	10PR	4.00E	160	540	1795	850
		12PR				1970	1000
6.00-15	TP403	10PR	4.50E	170	705	2615	825
6.50-10	TP401 TP402 TP403 TP405	10PR	5.00F	175	590	1965	1965
		12PR				2145	900
6.50-16	TP401	8PR	5.00	178	750	2232	621
6.90-9	TP403	10PR	5.50	175	545	1795	850
7.00-9	TP402 TP403	8PR	5.00S	190	590	2150	750
		10PR				2365	850
7.00-12	TP401 TP402 TP403 TP405	12PR	5.00S	190	676	2830	850
		14PR				3100	950
7.00-15	TP401 TP402 TP405	12PR	5.50F	200	750	3355	825
		14PR				3500	900
7.50-10	TP403	10PR	5.50F	205	645	2100	700
		12PR				2405	800
7.50-15	TP401 TP402 TP405	12PR	6.00G	215	780	3630	775
		14PR				3950	875
7.50-16	TP405	12PR	6.00G	215	775	3790	775
		16PR				4050	925
8.25-15	TP401 TP402 TP403 TP405	12PR	6.50	235	840	4100	700
		14PR				4435	800



TP401



TP402



TP403



TP404



TP405

SIZE	Pattern	PR	Standard Rim	S.W. mm	O.D. mm	Max Loda (kg)	Pressure (kpa)
8.25-12	TP403	12PR	6.50	235	765	3750	750
9.00-16	TP405	14PR	6.50H	255	890	4495	760
9.00-20	TP403	14PR	7.00	259	1018	5155	750
10.00-20	TP401 TP403	16PR	7.50	278	1055	6025	775
12.00-20	TP401	16PR	8.50	315	1125	6960	700
	TP403	18PR				7120	800
	TP404	20PR				7400	800
15x4 1/2-8	TP403	12PR	3.25L	122	385	950	900
15X7X8	TP401	16PR	5.50	194	381	2140	1000
16X6X8	TP401	16PR	4.33	170	406	1850	1000
18x7-8	TP401 TP402 TP405	14PR	4.33R	173	465	1840	900
		16PR				1960	1000
21x8-9	TP401 TP402 TP405	14PR	6.00E	200	535	2300	900
		16PR				2450	1000
23x9-10	TP401	12PR	6.50F	225	595	2485	650
	TP403	18PR				3005	900
	TP405	20PR				3200	1000
23x10-12	TP401 TP402 TP403	12PR	8.00	200	632	3290	700
27x10-12	TP401	14PR	8.00G	250	690	3620	750
28x9-15	TP401 TP403 TP405	14PR	7.00	220	710	3285	800
		16PR				3515	900
28X12.5-15	TP401	26PR	9.75	330	710	6390	1000
32X12.1-15	TP401	26PR	9.75	305	825	7980	1000
29x8-15	TP403	12PR	5.50	199	731	3115	860
		14PR				3400	1000
38X16-20	TP401	32PR	11.50	406	978	7615	1000
250-15	TP401 TP402 TP405	16PR	7.50	250	735	4350	850
		20PR				4725	1000
300-15	TP401 TP405	20PR	8.00	300	840	6825	900

Skid Steer Tires



TP421



TP422



TP425



TP426

SIZE	Pattern	PR	Standard Rim	S.W. mm	O.D. mm	Max Loda (kg)	Pressure (kpa)
10-16.5 TL	TP421	10PR	8.25	264	773	2135	520
	TP422 TP425 TP426	12PR				2375	620
12-16.5 TL	TP421	10PR	9.75	307	831	2540	450
	TP422	12PR				2865	550
	TP425 TP426	14PR				3075	620
14-17.5 TL	TP421	10PR	10.5	349	921	3105	380
	TP426	12PR				3430	450
		14PR				3875	550
15-19.5 TL	TP421	12PR	11.75	389	1019	4170	410
	TP426	14PR				4565	480
		16PR				4935	550
23x8.5-12 TL	TP421	6PR	7JA	213	574	820	340
27x8.5-15 TL	TP421 TP422	6PR	7JA	213	678	710	340
27X10.5-15 TL	TP422	6PR	8LB	259	691	750	310
		8PR				860	410
33X15.5-16.5 TL	TP421	12PR	11.75	394	838	4425	380
36X15-15 TT	TP422	16PR	10.50	375	908	3000	750
355/55D625TL	TP421	14PR	11.75	355	936	5840	520
445/50D710TL	TP421	18PR	W15L	450	1210	8500	750





G2/L2

G2/L2 OTR Tires

Suitable to loaders,excavators and bulldozers,operating on soft and muddy ground,with extremely strong traction,good self-cleaning and wide tread pattern provides good floating,and excellent drive properties on muddy road surface.

PATTERN	SIZE	PR	T.D (mm)	O.D	S.W	RIM	Max Load(Kg)		Pressure(Kpa)		TT/TL
				(mm)	(mm)		10km/h	50km/h	10km/h	50km/h	
G2/L2 TP22	13.00-24	12	23	1280	330	8.00	5600	3000	450	300	TT/TL
		16					6000	3250	525	350	
	14.00-24	12	26	1350	360	8.00	6300	3350	425	275	TT/TL
		16					7300	4000	550	375	
	15.5-25	12	25	1275	395	12.00/1.3	5600	3250	400	250	TT/TL
	17.5-25	12	26	1350	445	14.00/1.5	6150	3650	350	225	TT/TL
		16					7300	4250	475	300	
	20.5-25	16	29	1490	520	17.00/2.0	8250	5450	350	275	TT/TL
	23.5-25	20	32	1615	595	19.5	10900	7300	375	300	TL



TP41



TP42

E4 OTR Tires

Suitable for scrapers,heavy dump trucks operation on relatively poor road surface in areas like mining areas, tunnel, quarry, construction site etc.Deep tread pattern and wide riding area provide good cutting and wear resistances,improve ride properties on graver road,the tire has long service life and is durable.

PATTERN	SIZE	PR	T.D (mm)	O.D	S.W	RIM	Max Load(Kg)		Pressure(Kpa)		TT/TL
				(mm)	(mm)		10km/h	50km/h	10km/h	50km/h	
E4 TP42	14.00-24	24	46	1410	375	10.0	9500	5150	850	575	TL
		28					10000	5600	925	650	
	16.00-25	32	51.5	1615	480	11.25/2.0	12500	7300	875	650	TL
		36					13600	7750	975	725	
	18.00-25	40	54	1671	495	13.00/2.5	17000	9750	950	700	TL
E4 TP41	18.00-33	32	54	1876	495	13.00/2.5	17500	10000	750	575	TL
		36					18500	10600	850	625	
	21.00-25	32	54	1821	575	15.00/3.0	17500	10300	650	500	TL
		36					19000	11000	825	575	TL
	21.00-33	36	54	2011	575	15.00/3.0	20600	11200	700	575	TT/TL
		42					22400	12400	775	625	TT/TL
	21.00-35	36	54	2052	575	15.00/3.0	23000	12800	750	550	TL
		40					24300	14000	825	625	
	24.00-35	42	57	2177	650	17.00/3.5	29000	16500	750	550	TL
	24.00-49	42	57	2485	650	17.00/3.5	34500	20000	750	500	TL
		48					37500	21800	850	650	
	27.00-49	48	63.5	2703	735	19.50/4.0	43700	25000	775	575	TL
	30.00-51	52	69.5	2908	820	22.00/4.5	53000	30000	750	550	TL



E3/L3



E3B

E3 OTR Tires

Suitable to heavy dump trucks, scrapers and loaders under many conditions, excellent heat and wear resistances, excellent traction.

PATTERN	SIZE	PR	T.D (mm)	O.D	S.W	RIM	Max Load(Kg)		Pressure(Kpa)		TT/TL
				(mm)	(mm)		10km/h	50km/h	10km/h	50km/h	
E3/L3	16/70-20 (405/70-20)	12	27	1075	410	13.00	4675	2675	425	300	TT
	16/70-24 (405/70-24)	12	29	1175	410	13.00	5200	3075	425	300	TT
		14					5650	3375	450	350	
	13.00-24	12	25	1280	330	10.00	5600	3000	450	300	TT
		16					6000	3250	525	350	
	13.00-25	28	25	1300	350	8.50	5570	5010	740	740	TT
E3/L3 & E3B	14.00-24	16	26	1350	360	10.00	7300	4000	550	375	TT
		20					8500	4625	700	475	
		24					9500	5150	850	575	
	15.5-25	12	25	1275	395	12.00/1.3	5600	3250	400	250	TT/TL
		16					6800	3750	550	300	
	17.5-25	12	24	1350	445	14.00/1.5	6150	3650	350	225	TT/TL
		16					7300	4250	475	300	
	16.00-25	28	29	1490	430	11.25/2.0	11500	6700	750	575	TL
		32					12500	7300	875	650	
		36					13600	7750	975	725	
	18.00-25	28	32	1615	495	13.00/2.5	13600	8000	650	500	TL
		32					15000	8750	750	575	
		36					16000	9250	850	625	
	20.5-25	16	29	1490	520	17.00/2.0	8250	5450	350	275	TT/TL
		20					9500	6000	450	325	
	23.5-25	16	32	1615	595	19.50/2.5	8000	6150	300	225	TT/TL
		20					10900	7300	375	300	
		24					12500	8000	475	350	
	26.5-25	24	35	1750	675	22.00/3.0	13000	8850	375	225	TT/TL
		28					14000	9250	400	300	
		32					15500	10000	475	350	
	29.5-25	32	38	1875	750	25.00/3.5	20060	12300	540	370	TT/TL
		34					20150	9900	475	475	
	29.5-29	28	40	1975	750	25.00/35	19000	11800	425	325	TL
		34					21200	13200	525	400	
E3/L3	33.25-35	32	42	2240	845	27.00/3.5	25750	16000	425	325	TL
		38					28000	18000	525	400	
	37.25-35	36	46	2390	945	31.00/4.0	30750	19500	790	450	TL
		42					33500	21800	800	525	
	37.5-39	36	46.5	2542	953	32.00/4.5		21200		325	TL



L5 OTR Tires

Suitable to scrapers, loaders, graders, excavators, bulldozers on relatively poor road surface in areas like mining areas, tunnel, quarry, construction site, etc. With good wear and cutting resistance, wide and thick tread pattern provides good ground contact and control stability.

L5

PATTERN	SIZE	PR	T.D (mm)	O.D	S.W	RIM	Max Load(Kg)	Pressure(Kpa)	TT/TL
				(mm)	(mm)				
L5	17.5-25	20	45.5/63.5	1344	435	14.00/1.5	8250	575	TT/TL
		24					8950	650	
	20.5-25	20	51.5/71	1487	512	17.00/2.0	9500	450	TT/TL
		24					10300	525	
	23.5-25	20	54/78	1600	580	19.50/2.5	10900	375	TT/TL
		24					12500	475	TT/TL
		28					13600	550	TT/TL
		32					14600	625	TT/TL
	26.5-25	28	87.5	1750	667	22.00/3.5	15500	475	TL
		36					18300	625	TL
		40					19500	700	TL
	29.5-25	28	95	1970	745	25.00/3.5	17500	425	TL
		34					19800	535	TL
		40					21900	625	TL
	29.5-29	34	97.5	2023	750	25.00/3.5	21200	525	TT/TL
		36					22500	575	TT/TL
		40					23600	625	TT/TL
	33.25-35	38	106	2270	780	27.00	18000	400	TL
	37.25-35	42	116	2420	870	31.00	21800	400	TL
	35/65-33	30	63.5/97	2030	885	28.00/3.5	21200	425	TL
		36					23600	525	TL
		42					26400	625	TL
	40/65-39	36	75/115	2398	1077	32.00/4.0	30750	500	TL
		42					33500	575	TL
	45/65-39	36	75/116	2410	1086	32.00/4.0	32500	500	TL
		42					34200	400	TL
	41.25/70-39	42	75/115	2420	1069	32.00/4.5	3750	500	TL
	45/65-45	46	116	2670	1140	36.00/4.5	43750	525	TL
		58					50000	675	TL
	50/65-51	62	127	3061	1306	40.00/4.5	72600	650	TL
	67.5/60-51	84	137	3520	1690	46.00/5.5	103000	600	TL



L5S

L5S OTR Tires

Suitable to scrapers, loaders, excavators, operating under rocky harsh conditions in pit lane,tunnel,etc.,special stock compound provides optimum cutting and wear resistance, smooth thickened and super thickened treads increase rock puncture resistance,provide extremely high cutting resistance.

PATTERN	SIZE	PR	T.D (mm)	O.D	S.W	RIM	Max Load(Kg)	Pressure(Kpa)	TT/TL
				(mm)	(mm)				
L5S	12.00-20	18	56	1228	320	8.50	5450	740	TT/TL
	12.00-24	20	52	1275	315	8.50	6900	825	TT/TL
	14.00-20	20	63.5	1300	342	10.00	6000	670	TT/TL
	14.00-24	28	63.5	1420	375	10.00	10000	925	TT/TL
	16.00-25	36	63.5	1550	430	11.25/2.0	13600	975	TL
	18.00-25	40	78.5	1671	495	13.00/2.5	17000	950	TL
	17.5-25	20	63.5	1400	445	14.00/1.5	8250	575	TL
	20.5-25	24	71	1550	520	17.00/2.0	10300	525	TL
	23.5-25	24	78.5	1665	595	19.50/2.5	12500	475	TL
	26.5-25	28	87.5	1798	675	22.00/3.5	15500	475	TL
		36					18300	625	
	29.5-25	28	95	1923	750	25.00/3.5	17500	425	TL
		34					19800	535	
		40					21900	625	
	29.5-29	34	97.5	2023	750	25.00/3.5	21200	525	TL
		36					22500	575	
		40					23600	625	
	36/65-33	42	97	2045	907	28.00/3.5	25400	600	TL
		48					27200	650	
	45/65-45	58	116	2733	1143	36.00/4.5	51250	675	TL
	66/24-25	24	78.5	1669	569	21.00	12600	480	TL
	75/30-25	26	97.5	1923	790	25.00	17700	415	TL
		28					18850	450	



E7



E7 OTR Tires

Suitable to part of off-the-road vehicles operating on sand ground and loose road surface,with stable ride,good floating force and steering ability.

PATTERN	SIZE	PR	T.D (mm)	O.D	S.W	RIM	Max Load(Kg)	Pressure(Kpa)	TT/TL
				(mm)	(mm)		50km/h	50km/h	
E7	24.00-20.5	16	13	1369	610	18.00/0.5	5400	240	TL
	24-21	16	13	1372	610	18.00/1.5	5400	240	TL
	23.1-26	12	28	1580	587	20.00	5000	240	TL
		14	28	1580	587	20.00	5200	240	TL
	16.00-20	16	14	1323	419	10.00W	3700	240	TL

PATTERN	SIZE	STAR RATING	T.D (mm)	O.D (mm)	S.W (mm)	RIM	Max Load (Kg)	Pressure (Kpa)	Max Speed (Km/h)	TRA CODE	Load Index
TP05N	17.5R 25 (445/80R 25)	***	28	1348	445	14.00/ 1.5	6000	700	70	E2	170
TP05N	20.5R 25 (525/80R 25)	***	31	1492	520	17.00/ 2.0	7300	700	70	E2	179
TP05N/ZN	14.00R 24 (385/95R 24)	***	23	1356	382	10.00W	6000	800	70	E2	170
TP05N/ZN	14.00R 25 (385/95R 25)	***	23	1356	382	10.00/ 1.5	6000	800	70	E2	170
TP05N/ZN	16.00R 25 (445/95R 25)	***	28	1493	432	11.25/ 2.0	7300	700	70	E2	174
TPYN	15.5R 25	**	25	1275	395	12.00/1.3	4500	650	10/50	E2/L2	176/160
TPYN	17.5R 25	**	28	1348	445	14.00/ 1.5	5450	650	10/50	E2/L2	182/167
TPYN	20.5R 25	**	31	1492	520	17.00/ 2.0	11500	650	10/ 40	E2/L2	193/177
TPYN	23.5R 25	**	34	1617	597	19.50/ 2.5	14500	650	10/40	E2/L2	201/185
TPYN	26.5R 25	**	37	1750	673	22.00/ 3.0	18500	650	10/50	E2/L2	209/193
TPYN	29.5R 25	**	43.5	1873	750	25.00/ 3.5	22400	650	10/50	E2/L2	216/200
TPYN	16.00R 25	***	28	1493	432	14.00/ 1.5	6000	800	70	E2/L2	179
TP02N	750/65R25	**	44.5	1610	754	24.00/3.0	15000	475	10/50	E3/L3	202/190
TP02N	875/65R29	**	52.5	1875	879	28.00/3.5	21200	475	10/50	E3/L3	214/203
TP02N	600/65R25	**	35.5	1415	606	19.5/2.5	9750	475	10/50	E3/L3	187/178
TP02N	650/65R25	**	38.5	1480	640	19.5/2.5	11500	475	10/50	E3/L3	193/180
TP01N/DN	17.5R 25	**	28	1348	445	14.00/ 1.5	8500	575	10/50	E3/L3	182/167
TP01N/DN	20.5R 25	**	31	1492	520	17.00/ 2.0	11500	575	10/50	E3/L3	193/177
TP01N/02N/DN	23.5R 25	**	34	1617	597	19.50/ 2.5	14500	650	10/50	E3/L3	201/185
TP01N/02N/DN	26.5R 25	**	37	1750	673	22.00/ 3.0	18500	575	10/50	E3/L3	209/193
TP02N/DN	29.5R 25	**	43.5	1873	750	25.00/ 3.5	22400	575	10/50	E3/L3	216/200
TP02N	29.5R 29	**	43.5	1975	750	25.00/ 3.5	23600	575	10/50	E3/L3	218/202
TPTS	23.5R 25	**	48	1673	597	19.5/2.5	11500	525	10/50	E4	185
TPTS	26.5R 25	**	52	1750	673	22.00/ 3.0	11500	525	50	E4	193
TPTS	29.5R 25	**	57	1921	750	25.00/ 3.5	14000	525	50	E4	200

Radial OTR Tires Pattern



YANCHENG TUOPU TYRE CO.,LTD



PATTERN	SIZE	STAR RATING	T.D (mm)	O.D (mm)	S.W (mm)	RIM	Max Load (Kg)	Pressure (Kpa)	Max Speed (Km/h)	TRA CODE	Load Index
TP06S	18.00R 25	**	47	1673	498	13.00/ 2.5	9250	700	50	E4	185
TP06S	18.00R 33	**	49	1877	498	13.00/ 2.5	10900	700	50	E4	191
TP06S	21.00R33	**	54	2011	575	15.00/ 3.0	11500	700	10/50	E4	200
TP04S	18.00R 33	**	66	1877	498	13.00/ 2.5	10900	700	50	E4	191
TP04S	21.00R 35	**	61	2050	572	15.00/ 3.0	14500	700	50	E4	201
TP04S	24.00R 35	**	68	2170	653	17.00/ 3.5	18500	700	50	E4	209
TPRS	18.00R 33	**	66	1877	498	13.00/ 2.5	10900	700	50	E4	191
TPRS	21.00R 35	**	54	2046	572	15.00/ 3.0	14500	700	50	E4	201
TPRS	24.00R 35	**	58	2150	653	17.00/ 3.5	18500	700	50	E4	209
TPL5	17.5R 25	**	68	1399	445	14.00/1.5	8500	700	50	L5	182
TPL5	20.5R 25	**	78	1548	521	17.00/ 2.0	14500	600	10/50	L5	193
TPL5	23.5R 25	**	87	1673	597	19.50/ 2.5	14500	650	10	L5	201
TPL5	26.5R 25	**	96	1798	673	22.00/ 3.0	18500	650	10	L5	209
TPL5	29.5R 25	**	104	1921	750	25.00/ 3.5	22400	650	10	L5	216
TPL5	29.5R 29	**	104	2023	750	25.00/ 3.5	23600	650	10	L5	218
TPL5	35/65R 33	**	97	2077	889	28.00/ 3.5	23000	500	10	L5	224
TPHS	20.5R 25	**	72	1548	521	17.00/ 2.0	14500	600	10	L5	193
TPHS	23.5R 25	**	78	1673	597	19.50/ 2.5	14500	650	10	L5	201
TPHS	26.5R 25	**	87	1798	673	22.00/ 3.0	18500	650	10	L5	209
TPHS	29.5R 25	**	95	1921	750	25.00/ 3.5	22400	650	10	L5	216
TPHS	29.5R 29	**	95	2023	750	25.00/ 3.5	23600	650	10	L5	218
TPHS	35/65R 33	**	97	2077	889	28.00/ 3.5	23000	500	10	L5	224
TPSM	17.5R 25	**	65	1399	445	14.00/1.5	8500	700	10/50	L5S	182
TPSM	20.5R 25	**	72	1548	521	17.00/ 2.0	11500	600	10/50	L5S	193
TPSM	23.5R 25	**	78	1673	597	19.50/ 2.5	14500	650	10/50	L5S	201
TPSM	26.5R 25	**	87	1798	673	22.00/ 3.0	18500	650	10	L5S	209
TPSM	29.5R 25	**	95	1921	750	25.00/ 3.5	22400	650	10	L5S	216
TPSM	29.5R 29	**	95	2023	750	25.00/ 3.5	23600	650	10	L5S	218
TPSM	35/65R 33	**	97	2075	880	28.00/ 3.5	28000	650	10	L5S	224
TPR01	24.00R49	**	57	2025	650	17.00/3.5	21800	700	10/50	E4	215
TPR01/04	27.00R49	**	63	2702	737	19.5/4.0	27250	700	10/50	E4	223
TPR04	30.00R51	**	74	2904	823	22.00/4.5	33500	700	10/50	E4	230
TPR02/04	33.00R51	**	78	3061	894	24.00/5.0	38375	700	10/50	E4	235
TPR01/04	36.00R51	**	80	3233	988	26.00/5.0	46250	700	10/50	E4	241
TPR03	37.00R57	**	84	3390	1016	27.00/6.0	51500	700	10/50	E4	246
TPR01/03	40.00R57	**	88	3594	1097	29.00/6.0	60000	700	10/50	E4	250

Radial OTR Tires Pattern



TPSM



TPHS



TPL5



TPR01



TPR02



TPR03



TPR04

Agricultural Tires R-1 Pattern :

Size	type	PR	Pattern	Rim	T.D (mm)	S.W (mm)	O.D (mm)	Load Capacity (kg)	Pressure (kpa)
30.5L-32	TT/TL	12	TP221	DW27	56	775	1845	4710	140
		16		DW27	56	775	1846	5370	180
24.5-32	TT/TL	12	TP221	DW21A	43	620	1805	4000	170
23.1-26	TT	10	TP247	DW20	40	587	1605	3245	140
		12						3610	170
20.8-38	TT	8	TP247	W18L	40	525	1835	3475	160
		10						4000	200
		12						4450	240
20.8-42	TL	10	TP221	18	43	528	1935	6250 @10km/h	190
	TL	14		18	43	528	1935	7700@10km/h	290
18.4-38	TT	8	TP219	W16L	37	467	1775	2715	140
		10						3165	180
		12						3575	230
18.4-34	TT	8	TP219	W16L	37	467	1655	2565	140
		10						2990	180
		12						3375	230
18.4-30	TT	8	TP219	W16L	37	467	1550	2415	140
		10						2815	180
		12						3180	230
18.4-26	TT	8	TP247	DW16	37	467	1450	2265	140
		10						2645	180
		12						2985	230
16.9-38	TT	8	TP247	W15L	44	430	1685	2520	170
		10						2760	200
16.9-34	TT	8	TP247	W15L	39	430	1585	2380	170
		10						2605	200
16.9-30	TT	8	TP247	W15L	37	430	1485	2245	170
		10						2455	200
16.9-28	TT	8	TP247	W15L	37	430	1435	2175	170
		10						2380	200
16.9-24	TT	8	TP247	W15L	37	430	1335	2040	170
		10						2230	200
		12						2410	230
16/70-20	TT	10	TP246	W14	33	410	1075	2310	250
15.5-38	TT	8	TP247	W14L	37	395	1570	2060	180
		10						2320	230



TP221



TP269



TP246



TP247



TP219

Agricultural Tires R-1 Pattern :

Size	type	PR	Pattern	Rim	T.D (mm)	S.W (mm)	O.D (mm)	Load Capacity	Pressure (kpa)
								(kg)	
15.5/80-24	TL	12	TP247	W13	32	394	1262	3000	300
15-24	TT	10	TP247	W14	33	410	1330	2800	280
14.9-30	TT	8	TP247	W13	38	378	1415	1940	180
		10						2190	230
14.9-28	TT	8	TP247	W13	38	378	1365	1880	180
		10						2120	230
14.9-26	TT	8	TP247	W13	36	378	1315	1820	180
		10						2055	230
14.9-24	TT	6	TP247	W13	34	378	1265	1510	140
		8						1760	180
13.6-28	TT	8	TP247	W12	35	345	1310	1645	200
		10						1910	250
13.6-24	TT	6	TP247	W12	35	345	1210	1340	160
		8						1545	200
12.4-24	TT	6	TP247	W11	34	315	1160	1200	170
		8						1415	230
12-38	TT	8	TP247	DW11	38	330	1575	1570	140
		10						1760	200
12.00-18	TT	10	TP269	9.00V	19	327	1090	1800	350
		12						1950	420
11.2-38	TT	4	TP247	W10	25	285	1448	950	120
		6						1150	180
11-38	TT	6	TP247	W10	32	305	1540	1400	140
		8						1545	160
12.4/11-28	TT	6	TP219	W11	34	315	1260	1275	170
11.2-28	TT	6	TP219	W10	35	285	1205	1115	180
		10						1500	300
11.2-24	TT	6	TP219	W10	33	285	1005	1045	180
		8						1225	240
11.2-20	TT	8	TP221	9.00	22	260	760	950	310
9.5-24	TT	6	TP221	W8	30	240	1050	940	210
9.5-20	TT	6	TP221	W8	25	240	950	810	210
		8						955	280
8.3-24	TT	6	TP221	W7	28	210	995	810	240
8.3-20	TT	6	TP221	W7	28	210	895	695	240
750-20	TT	6	TP221	5.50F	24	205	910	760	210
750-18	TT	6	TP221	5.50F	14	203	850	950	225
		8						1135	270
750-16	TT	6	TP221	5.50F	25	205	810	650	210
650-16	TT	6	TP221	5.00F	24	180	765	565	250
600-16	TT	6	TP221	4.50E	30	165	745	495	250
600-12	TT	6	TP221	4.50E	20	165	640	405	250
550-17	TT	6	TP221	4.00E	22	138	750	400	280

Agricultural Tires R-2 Pattern :

Size	type	PR	Pattern	Rim	T.D (mm)	S.W (mm)	O.D (mm)	Load Capacity(kg) Max@40km/h	Pressure (kpa)
5.50-17	TT	6	TP49	4.00E	50	138	798	400	280
6.00-12	TT	6	TP49	4.50E	50	165	690	425	270
6.50-16	TT	6	TP49	5.00F	60	170	810	600	270
7.50-16	TT	6	TP49	5.50F	63	200	895	650	210
8.3-20	TT	6	TP49	W7	62	210	950	970	270
8.3-24	TT	6	TP49	W7	72	210	1050	1135	270
9.50-24	TT	6	TP22	W8	60	240	1150	1315	240
		6	TP49	W8	80	240	1150	1315	240
11-32	TT	6	TP49	W10	90	305	1490	1080	160
11.2-24	TT	6	TP49	W10	82	285	1205	1465	210
12.00-18	TT	10	TP49	9.00V	60	327	1090	1800	350
		12						1950	420
12.4-26	TT	6	TP49	W11	83	315	1265	1240	160
12.4/11-28	TT	6	TP49	W11	83	315	1315	1785	200
13.6-38	TT	6	TP49	W12	85	345	1710	2160	160
		8						2675	230
		10						2975	280
14.9-30	TT	10	TP49	W13	90	378	1495	2190	230
16.9-34	TT	8	TP49	W15L	90	430	1670	2380	170
		10						2605	200
23X10-10	TT	4	TP49	8.00I	25	254	600	385	60
19.5L-24	TT	8	TP50	W17	92	495	1345	1900	140
		10						2120	170
		12						2360	210
23.1-26	TT	8	TP50	DW20A	89	587	1660	2850	110
		10						3245	140
		12						3610	170
28L-26	TT	10	TP50	DW25	93	715	1615	3460	120
		12						3785	140
		14						4245	170

Agr.Tire I-1

Size	type	PR	Pattern	Rim	T.D (mm)	S.W (mm)	O.D (mm)	Load Capacity(kg) Max@50km/h	Pressure (kpa)
5.90-15	TT/TL	4	I-1	4.50	5.0	157.5	663	515	250
6.70-15	TT/TL	8	I-1	4.50	5.0	170.2	701	950	390
7.60-15	TT/TL	8	I-1	5.50	6.0	190.5	729	950	360
9.5L-14	TT/TL	8	I-1	7.00	7.5	243.9	739.2	1090	300
9.5L-15	TT/TL	8	I-1	7.00	7.5	246.4	767.1	1120	300
	TT/TL	12	I-1	7.00	7.5	246.4	767.1	1360	390
11L-14	TT/TL	6	I-1	8.00	7.5	274.8	746.8	925	190
11L-15	TT/TL	8	I-1	8.00	7.5	274.3	779.8	1150	250
	TT/TL	12	I-1	8.00	7.5	274.3	779.8	1450	360
11L-16	TT/TL	8	I-1	8.00	7.5	279.4	797.6	1215	250
12.5L-15	TT/TL	8	I-1	10.00	7.5	322.6	823	1360	250
	TT/TL	10	I-1	10.00	7.5	322.6	823	1550	300
	TT/TL	12	I-1	10.00	7.5	322.6	823	1750	360

Size	type	PR	Pattern	Rim	T.D (mm)	S.W (mm)	O.D (mm)	Load Capacity	Pressure (kpa)
								(kg)	
7.50-16	TT	6	R4	5.50F	18	205	765	650	210
12.9-18	TT	10	R4	9.00V	22	327	1090	1800	350
18.4-26	TL	12	R4	DW16		467	1450	2985	230
16.9-24	TL	8	R4	W15L	26	430	1309	2650	190
		10	R4					2900	220
16.9-28	TL	10	R4	W15L	28	430	1410	2380	200
		12	R4					2730	240
10.0/75-15.3	TT	6	R4	9.00	15	264	760	1120	230
		8	R4					1330	310
		10	R4					1525	390
10.5/80-18	TL	8	R4	9.00	21	274	905	1710	300
		10	R4					1935	370
12.5/80-18	TL	10	R4	9.00	24	308	985	2375	310
		12	R4					2625	370
		14	R4					2910	430
		16	R4					3130	490
17.5L-24	TL	10	R4	W15L	26	445	1241	2800	220
		12	R4					3075	260
19.5L-24	TL	10	R4	DW16A	30	495	1314	3000	190
		12	R4					3450	230
21L-24	TL	10	R4	DW18A	30	533	1378	3350	180
		12	R4					3875	220

Agricultural Tyres F-2,F-3,F-2M

Size	type	PR	Pattern	Rim	T.D (mm)	S.W (mm)	O.D (mm)	Load Capacity	Pressure (kpa)
								(kg)	
4.00-12	TT	4	F-2	3.00	8.0	110	535	250	340
4.00-14	TT/TL	4	F-2	3.00	10.0	110	590	270	340
5.00-15	TT	4	F-2	3.00	14.0	130	645	365	280
		6	F-2	3.00	14.0			465	420
5.50-16	TT	6	F-2	4.00	15.0	150	710	525	370
6.00-16	TT	6	F-2	4.00	13.0	160	740	560	340
6.50-16	TT	6	F-2	4.50	16.0	175	760	615	330
7.5L-15	TT	6	F-2	6.00	20.0	205.7	740.7	650	300
7.50-16	TT	8	F-2	5.50	19.0	205	810	870	390
7.50-18	TT/TL	8	F-2	5.50	20.5	205	853.4	850	390
7.50-20	TT	8	F-2	5.50	22.0	205	910	1070	390
9.5L-15	TT	8	F-2	7.00	22.0	243.8	779.8	850	330
10.00-16	TT	8	F-2M	8.00	23.0	271.8	910	1190	300
11.00-16	TT/TL	8	F-2M	10.00	32.8	320	970	1320	280
11L-15	TT/TL	10	F-2,F-3	8.00	23.0	277	810	950	300
11L-16	TT/TL	12	F-3	8.00	12.0	280	835	1250	440



TP249



TP250



R-4



I-1



F-2M



F-2



F3

Agricultural Implement Tyres

SIZE	PR	Pattern	Standard	Inflated Diameter (mm)			Load Capacity (KG)		Pressure
			RIM	T.D	S.W	O.D	30KM/H	40KM/H	(KPA)
10.0/80-12	8	IMP-01	9.00	9.50	271	719	1500	1250	420
	10						1700	1450	540
10.0/80-12	8	IMP-03	9.00	8.50	259	714	1500	1250	420
	10						1700	1450	540
10.5/65-16	10	IMP-01	9.00	9.50	274	755	1850	1550	520
	14						2300	1900	710
10.0/75-15.3	10	IMP-01 MP-02	9.00	9.00	264	762	1800	1550	520
	12						2000	1700	640
	14						2240	1900	710
	16						2430	2060	710
11.5/80-15.3	12	IMP-01	9.00	8.00	292	848	2575	2180	560
	14						2900	2430	650
	16						3075	2575	710
11.5/80-15.3	14	IMP-02	9.00	9.5	292	848	2900	2430	650
12.5/80-15.3	14	IMP-01	9.00	10.50	312	889	3075	2650	580
	16						3350	2800	650
12.5/80-15.3	14	IMP-02	9.00	10.5	307	889	3075	2650	580
10.5/80-18	10	IMP-03	9.00	10.50	307	914	3250	2725	490
12.5/80-18	14	IMP-03	9.00	14.5	307	965	3550	3000	590
13.0/65-18	16	IMP-01	11.00	10.0	333	889	3350	2800	670
	16	IMP-02	11.00	10.0	333	889	3350	2800	670
	16	IMP-04	11.00	9.5	336	889	3350	2800	670
16.5/70-18	14	IMP-06	13.00		420	1065		3450	420
15.0/55-17	12	IMP-05	13.00	12.50	389	848	2800	2360	420
	14						3075	2575	490
	16						3310	2910	570
400/60-15.5	14	IMP-01	13.00	11.00	410	874	3250	2725	490
	16						3650	3250	520
400/60-15.5	14	IMP-04	13.00	10.00	396	873	3250	2725	490
	16						3560	3250	520
500/50-17	14	IMP-03	16.00	13.00	500	933	3875	3550	360
	16						4250	3875	400
	18						4500	4125	440
500/60-22.5	16	IMP-02	16.00	13.0	503	1180	3450	3150	320
550/60-22.5	16	IMP-02	16.00	13.0	537	1240	3750	3350	280



IMP01



IMP02



IMP03



IMP04



IMP05



IMP06

Agricultural Implement Tire

SIZE	PR	Pattern	Standard	Inflated Diameter (mm)			Load Capacity (KG)		Pressure (KPA)
			RIM	T.D	S.W	O.D	30KM/H	40KM/H	
4.0-10	4	TR-01	3.00	18.50	114	475	180	144	240
5.0-10	4	TR-01	4.00	18.50	264	508	236	210	200
5.00-15	4	TR-02	4.00	15.5	145	657	530	475	290
	6						670	600	480
6.5/80-12	4	TR-02	5.00	15.00	163	588	600	545	310
	6						775	710	460
6.5/80-15	4	TR-02	5.00	15.00	163	663	740	680	330
	6						900	825	490
	8						1060	950	650
5.00-12	6	ZR-03	4.00	15.00	264	508	330	300	200
10.0/75-15.3	10	ZR-03	9.00	25.00	556	770	1800	1550	520
	12						2000	1700	640
	14						2240	1900	710
11.5/80-15.3	10	ZR-03	9.00	26.70	290	854	2300	1950	460
	12						2575	2180	560
	14						2900	2430	650
11.5/80-15.3	10	ZR-100	9.00	26.50	290	846	2300	1950	460
	12						2575	2180	560
	14						2900	2430	650
6.00-16	8	ZR-07	4.50	16.00	165	735	825	750	350
6.50-16	8	ZR-07	5.50	19.00	188	750	728	650	250
7.50-16	6	ZR-07	6.00	21.00	214	803	1090	975	290
	8						1360	1215	415
8.25-16	8	ZR07	6.00	22.00	229	848	1036	925	300
250/80-18	8	ZR07	8.00	24.00	250	866	1254	1120	240
280/70-16	8	ZR07	9.00	24.00	282	793	1254	1120	240
280/70-18	8	ZR07	9.00	24.00	282	848	1322	1180	240
400/60-15.5	8	TRC-02	13.00	19.00	400	875	2360	2000	320
	14						3250	2725	490
	18						3875	3450	620
500/60-22.5	12	TRC-03	16.00	21.00	503	1180	2900	2650	240
	16						3450	3150	320
550/60-22.5	16	TRC-03	16.00	21.0	537	1240	3750	3350	280
600/50-22.5	16	TRC-03	20.00	21.0	600	1180	3650	3250	260
650/50-22.5	16	TRC-03	20.00	21.0	650	1240	3710	3300	260



TR01



TR02



ZR07



ZR100



TRC02



TRC03

[illegible]

YANCHENG TUOPU TYRE CO.,LTD




OTR TYRE BUILDING WORKSHOP




SOLID TYRE CURING WORKSHOP



DEVELOPMENT&EQUIPMENT

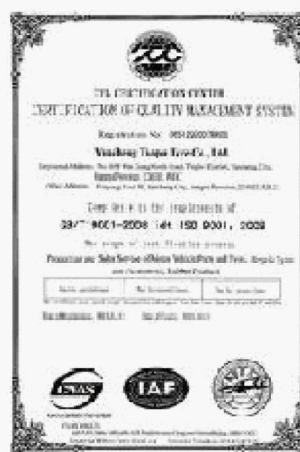

ISO9001:2000

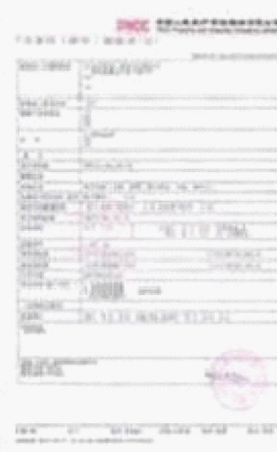

PRODUCT QUALITY LIABILITY INSURANCE



SGS authentication company



ENGINEERS CHECKING OTR TYRE IN INDONESIA



盐城托普轮胎有限公司
江苏省盐城市范公路88号
电话: +86-515-88210331
传真: +86-515-88266539
+86-4008875666-202988
邮箱: sales@topowertyre.com
topowertyre@gmail.com
网址: <http://www.tuoputire.com>

YANCHENG TUOPU TYRE CO., LTD.
No. 88, Fangong Road, Yancheng City Jiangsu, 224002 China
Tel: +86-515-88210331
Fax: +86-515-88266539 , +86-4008875666-202988
Email: sales@tuoputire.com topowertyre@gmail.com
URL: <http://www.tuoputire.com>